DyMac GLOBAL

The FuelHub Compact double wall tank range has been designed for the safe and secure storage and transfer of various industrial lubricants and hazardous liquids world wide.



Available Sizes

- ✓ FHC-1000L / 264G (Transportable)
- ✓ FHC-2000L / 528G (Transportable)
- ✓ FHC-3000L / 792G (Transportable)
- ✓ FHC-4000L / 1057G (Stationary)
- ✓ FHC-5800L / 1532G (Stationary)
- ✓ FHC-7800L / 2060G (Stationary)
- ✓ FHC-9750L / 2576G (Stationary)

FuelHub compact

Overview

FuelHub compact

Enhanced Design Features

Portable & Static

The FuelHub Compact range, from 1000L to 9750L is guaranteed for the safe and secure storage of fuels & lubricants, and should only be lifted when empty. The FuelHub Compact range from 1000L to 3000L are transportable tanks & 4000L to 9750L are stationary tanks.

Unique Design Standard

The FuelHub double wall tanks are designed with an integral secondary containment tank, and therefore do not require independent bunds for leak containment. This innovative design feature gives access to an extra-large equipment compartment area on all FuelHub Compact tanks.

Maintenance

This design ensures a fast, easy and convenient installation in any location, indoors or out.

Durability

The Cube-style tank design allows for 360-degree tank viewing and inspection. A high-grade paint finish ensures longer durability when exposed to the elements.



Design Innovation

Take a look inside

The FuelHub Compact tank range has been designed with Bi-directional forklift pockets for ease of manouveravblity on site. It comes with four stacking corners which also act as lifting devices.

There are conveniently positioned ports & fittings with a recessed equipment compartment area for the upfitting of various 12V Diesel electrical pumps. The tank range is ideal for quick connection to Generators and Pump sets.



Standard Features



Automatic Dispensing Nozzle with 4M or 8ft hose and various electric pump size options.



Galvanized stacking corner doubles up as a lifting bracket.



Ports & Fittings Plate

FuelHub compact

Model (FHC-3000L/792G)

The FuelHub Compact FHC-3000L is designed for the safe and secure storage of various industrial lubricants and hazardous liquids worldwide.



Specifications

Specifications	Metric	US	Imperial
Capacity	2860 Litres	756 Gallons	629 Gallons
Length	2294 mm	7ft 6"	7ft 6"
Width	1546 mm	5ft 1"	5ft 1"
Height	1280 mm	4ft 2"	4ft 2"
Outer Tank Thickness	4 mm	8 Gauge	8 Gauge
Inner Tank Thickness	4 mm	8 Gauge	8 Gauge
Weight, Tare	1147 kg	2528 lbs	2528 lbs
Weight, Laden	3455 kg	7617 lbs	7617 lbs
Safe Fuel Fill Level	2715 Litres	717 Gallons	597 Gallons

Approvals and Certifications


UK & Europe


- ✓ UN 31 A/Y Compliant Design
- ✓ 110% Bunded
- ✓ Adhering to ADR Regulations
- ✓ CE Marked

USA & Canada

- ✓ ULC S601 Compliant Design
- ✓ UL 142 Compliant Design
- ✓ UN 31 A/Y Compliant Design

The information listed in this document is for illustration purposes only and may be subject to change without notice. Users are responsible for verifying its suitability for their needs.

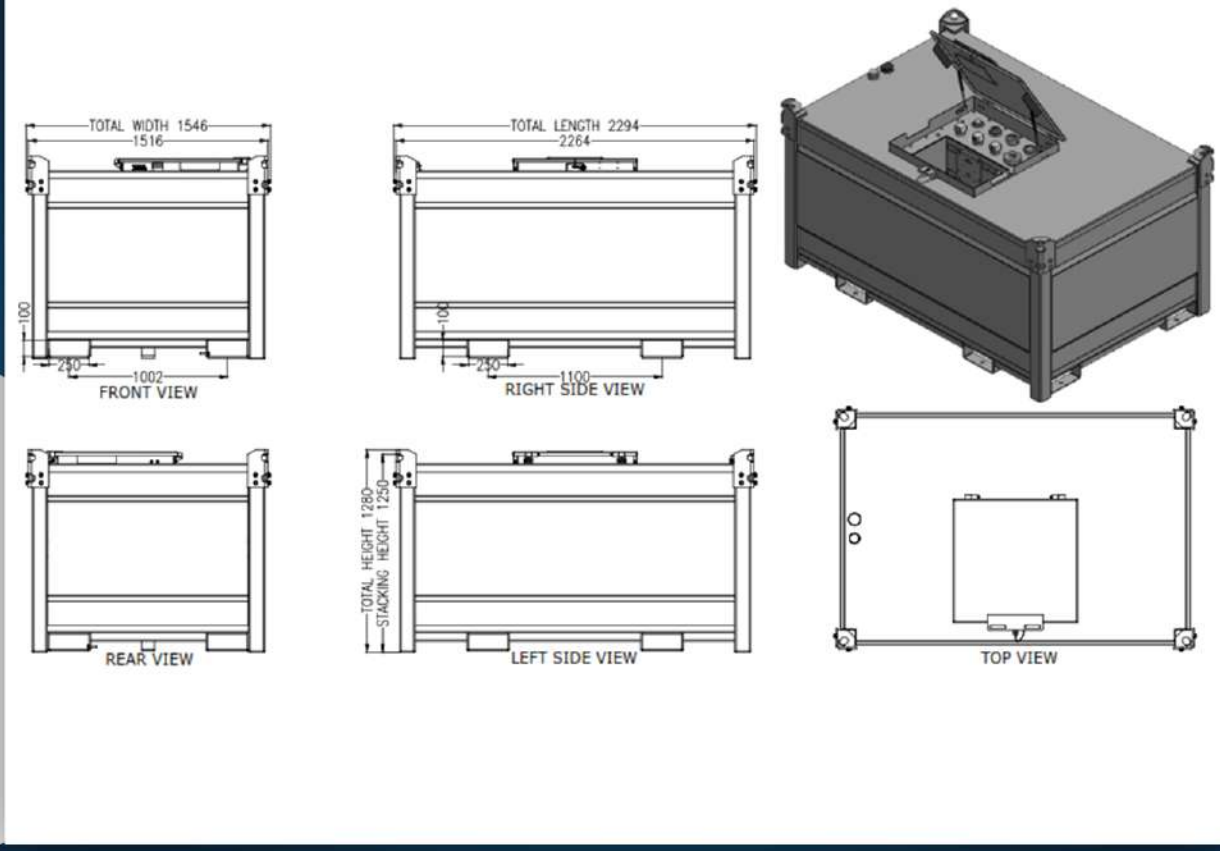

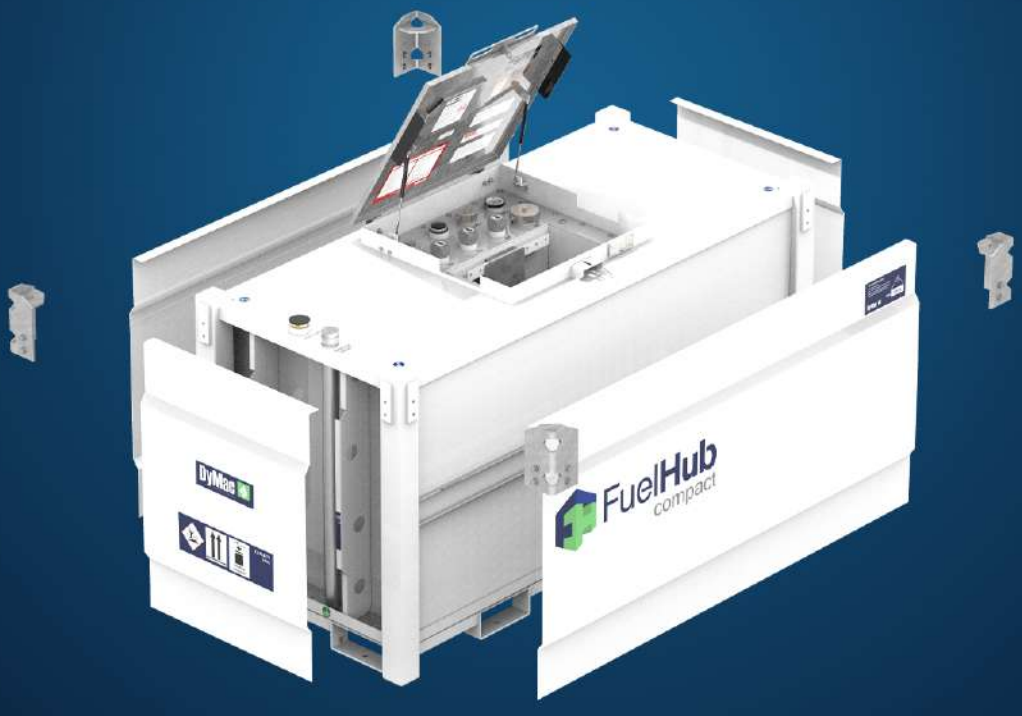

The information listed in this document is for illustration purposes only and may be subject to change without notice. Users are responsible for verifying its suitability for their needs.