


P11000 230/115V 50Hz #HUK



Power Rating

Maximum power MAX	kVA	10.8
Maximum power MAX	kW	9.7
Continuous power COP	kVA	10.0
Continuous power COP	kW	9.0
Frequency	Hz	50
Voltage	V	230/115
Power factor	cos ϕ	0.9
Phase		1
Fuel		Diesel

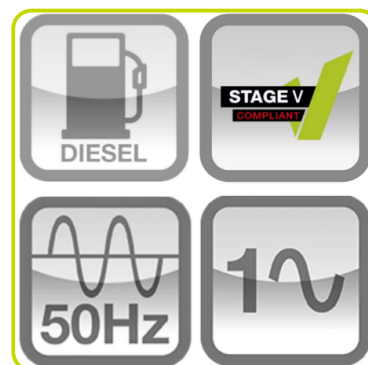

Ratings definition (ISO-8528-1)

MAX - Maximum Power:

It is defined as the power given by multiplying the current and voltage that the generating set is capable of delivering for at least 5 min. Prescribed output voltage shall be within $\pm 10\%$ of the rated voltage and prescribed output frequency shall be within $\pm 8\%$ of the rated frequency.

COP - Continuous Power:

It is defined as being the maximum power which the generating set is capable of delivering continuously while supplying a constant electrical load when operated for an unlimited number of hours per year under the agreed operating conditions with the maintenance intervals and procedures being carried out as prescribed by the manufacturer.

Gensets are compliant with EC mark which includes the following directives and standards and subsequent modification and integration:

- 2006/42/CE Machinery safety
- 2014/30/UE Electromagnetic compatibility
- 2014/35/UE electrical equipment designed for use within certain voltage limits
- 2000/14/EC Sound Power level. Noise emissions outdoor equipment. (amended by 2005/88/EC) – If applicable
- 97/68/EC Emissions of gaseous and particulate pollutants. (amended by 2016/1628 EC) – If applicable
- ISO 8528 as applicable
- 2011/65 ROHS
- EN 12100, EN 13857, EN 60204 as referred into the ISO8528-13

Company with quality certification ISO 9001



Engine specifications

Engine Brand	Yanmar	
Model	3TNM74F-NHPGE	
[50Hz] Exhaust emission level	Stage V	
Engine cooling system	Water	
Displacement	cm ³	993
Aspiration	Natural	
Operating Speed-Nominal	rpm	3000
Speed governor	Mechanical	
Fuel	Diesel	
Oil capacity	l	3.4
Coolant capacity	l	1
Starting system	Electric	
Electric circuit	V	12

Alternator Specifications

Alternator	Mecc Alte	
Class	H	
IP protection	23	
Poles	2	
Frequency	Hz	50
Voltage	V	230
Voltage regulation system	Capacitor	
Voltage tolerance	%	5

Dimensional data

Length	(L) mm	1400
Width	(W) mm	650
Height	(H) mm	975
Weight	kg	328

Fuel Tank - Autonomy

Fuel tank capacity	l	24
Fuel consumption @ 75% COP	l/h	2.85
Fuel consumption @ 100% COP	l/h	4.04
Running time @ 75% COP	h	8.42
Running time @ 100% COP	h	5.94

Noise level

Guaranteed noise level (LWA)	dB(A)	96
Measured noise level (LWA)	dB(A)	95
Noise pressure level @ 1 m	dB(A)	81
Noise pressure level @ 7 m	dB(A)	68

Electrical Data

Battery Voltage	V	12
Battery capacity	Ah	45
Battery	n	1



Genset equipment


ENCLOSURE:

- Weatherproof enclosure made of galvanized sheet metal.
- Superior noise attenuation thanks to high quality soundproofing material.
- Highly efficient residential silencer integrated inside the canopy.
- External fuel filling point for simple and quick refueling operation.
- Single lifting point for effortless handling.
- Hinged canopy design allows full access to all internal components.



BASE FRAME AND TANK:

- Base frame designed for easy fork handling.
- High capacity integrated fuel tank for extended run-time.
- Fuel level sensor.
- Sturdy supporting frame between engine-alternator and canopy.
- Properly sized anti-vibration mounts.

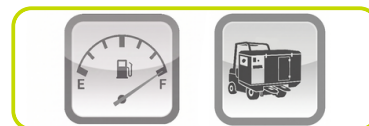

ENGINE EQUIPPED WITH:

- Battery
- Liquids (No Fuel)
- Lube oil pressure sensor



GENSET CONTROL PANEL

COMMANDS

- Start selector switch with key: OFF - ON - START
- Voltage Selector Switch 230/115V



INSTRUMENTATION (Analogic)

- Hour-counter

PROTECTIONS

- Circuit breaker
- Low oil pressure Alarm Lamp
- Low Fuel level Alarm Lamp

SOCKET TYPE

2P+T CEE 115V 16A IP44	2
2P+T CEE 115V 32A IP44	2
2P+T CEE 230V 16A IP44	2
2P+T CEE 230V 32A IP44	1



ACCESSORIES

Wheel kit	WKS
-----------	-----

